


## Technical Datasheet

**Model Name** : ENLIGHT 40-0300-PL-2DS  
**Model No.** : 040C0300ZEC  
**Description** : Constant Current LED Driver (Isolated)  
**BIS Approbations** : IS 15885 (Part 2 / Sec 13)  
**BIS Status** : In Process

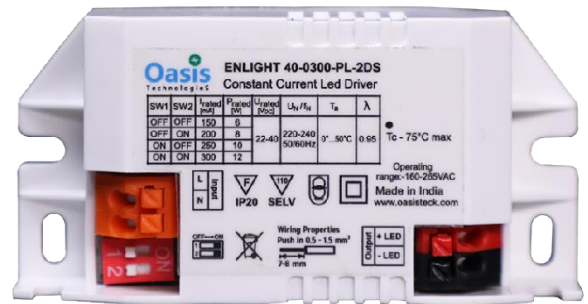

### Technical Specifications:

Category	Parameters	Specifications
<b>Features</b>	Output Type	Constant Current
	Dimming Type	Non Dimmable
	IP Grade	IP 20
	Insulation Class	Class II
	Application	Indoor
<b>Input</b>	Rated Input Voltage	220 - 240VAC
	Operating Input Voltage	160-265VAC
	Frequency	50-60Hz
	Input Current	0.061A
	Input Power	14W
	Power Factor	>0.95
	ATHD	<10%
	No Load / Standby Power	<0.5W
	Galvanic Isolation (Input to Output)	1.5KV
Input Overvoltage Protection	>300VAC ±5VAC	
Input Under voltage Protection	<80VAC ±5VAC	
<b>Output</b>	Output Current	150-300mA
	Output Voltage	22-40VDC
	Output Power	6-12W
	Current Tolerance	<5%
	Efficiency	≥85% @ 100% load (240VAC)
	Current Ripple	<30%
	Overload Protection	Yes
	Open Circuit Protection	Yes
Short Circuit Protection	Yes	
<b>Environment &amp; Protection</b>	Ambient Operating temperature Range	0°C - 50°C
	Storage Temperature	-20°C to +75°C
	Max Case Temperature	75°C
	Surge Protection	4KV
	440VAC Protection	2Hrs
<b>Construction</b>	Connection	Connector 2pole 45° push-in with release key
	PRI Wire Preparation	8.5-9.5mm Strip length (0.5-1.5sqmm)
	SEC Wire Preparation	8.5-9.5mm Strip length (0.5-1.5sqmm)
	Dimensions	80x40x22MM
	Weight	52Gms

**Dip Switch Combination:**

Combination	SW1	SW2	Output
1	OFF	OFF	150mA
2	OFF	ON	200mA
3	ON	OFF	250mA
4	ON	ON	300mA

**Wiring instructions:**

- All connections must be kept as short as possible to ensure good EMI behavior
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 . 10 cm distance)
- Advice the maximum length of output wires is 2Mtrs.
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips,louwer, etc.)

Reach us at:  [www.oasisteck.com](http://www.oasisteck.com) /  [mkt@oasisteck.com](mailto:mkt@oasisteck.com) /  +9120 41290768 /  +91 7559441929

*\* The information provided herein is subject to change without notice. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Oasis.*